




23940-1/2/3

LED panel 300x1200



colour	ww/nw/cw
colour temp	2800-6500K
power factor	>0.95
dimnable	no
input voltage	AC 85-265V
cri	>80
efficacy l/w	90-95 lm/w
total lumen	3600-3800-4320-4560 lm
life time	50.000 hrs
beam angle	120 deg
wattage	40 watt – 48 watt
driver type	isolated ic driver
replacement for	fixture + 2 x Tube 120 cm
length x width	300 x 1200 mm
height	1,1 cm
led type	SMD2835
frame	AL6063 aluminium
panel front	frosted pvc
certificates	tüv / CE/rohs
warranty	3 years

Note

Specifications listed are in effect at time of printing and are subject to alteration without prior notice or obligation.
RAW LED reserves the right to periodically upgrade these specifications through additions, deletions and substitutions.

RAW LED B.V.



Hellingweg 134 | 2583 DX The Hague | The Netherlands

T +31(0)70 322 54 73 | F +31(0)70 322 54 73 | info@rawled.com | www.rawled.com




Light output

raw *led*

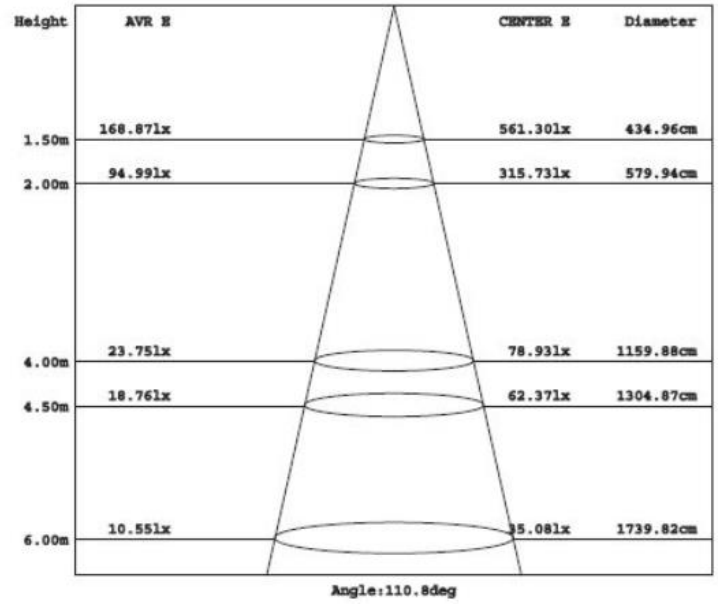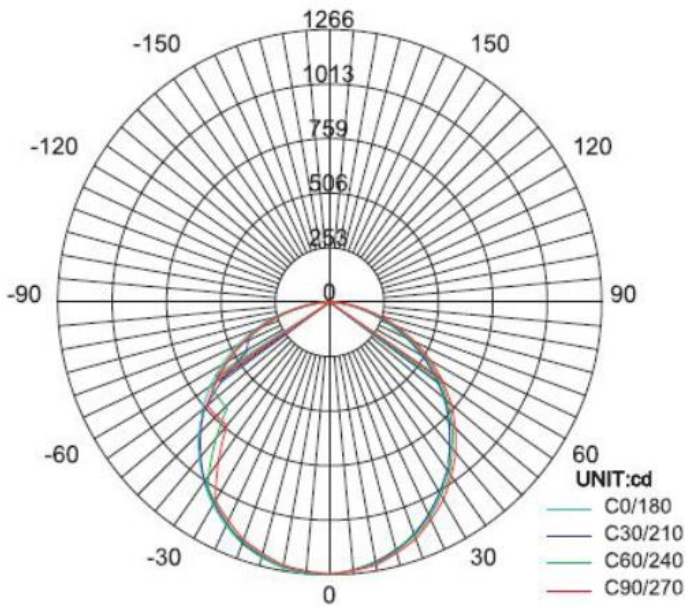

Dimensions

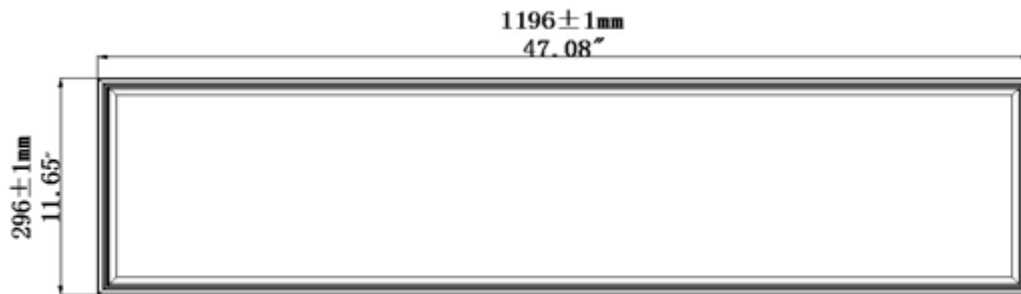





raw led

Packaging

5 boxes in an outside box

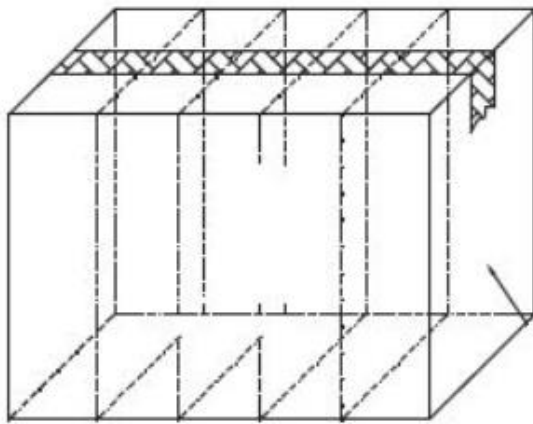

127*36*24cm

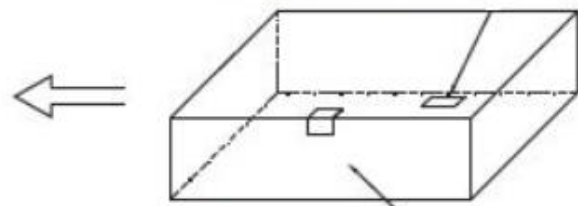

Five panels in a box