



727164-1D

Led gloeilamp bol E27



colour	2200K – 2500K – 2700K
base	e27
cri	>80
voltage	220 -240V
efficacy l/w	100 lm/w
dimnable	yes
total lumen	400-600
life time	35.000 hrs
beam angle	360 deg
wattage	4-6 watt
replacement for	bulb 40-60 watt
diameter ø	50 mm
height	100 mm
bulb finish	Clear glass
certificates	TUV / CE/rohs
warranty	2 years

Note

Specifications listed are in effect at time of printing and are subject to alteration without prior notice or obligation. RAW LED reserves the right to periodically upgrade these specifications through additions, deletions and substitutions.

RAW LED B.V.


Hellingweg 134 | 2583 DX The Hague | The Netherlands

T +31(0)70 322 54 73 | F +31(0)70 358 41 80 | info@rawled.com | www.rawled.com



raw ^{led}

Light source test report

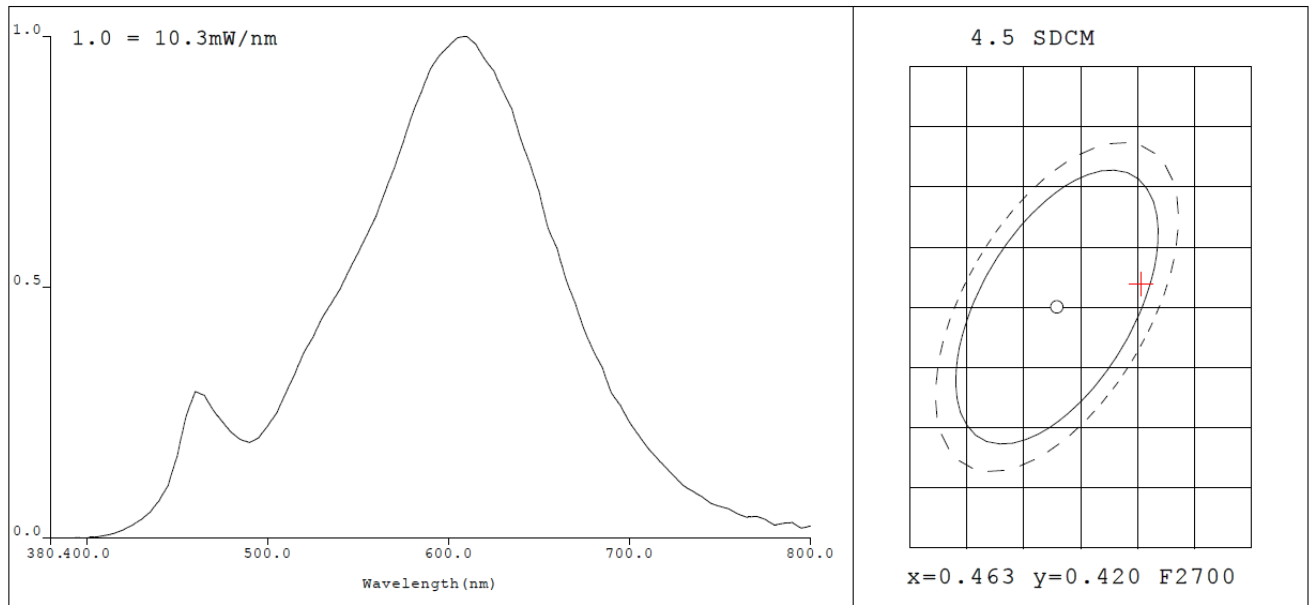

CIE Color Parameters:

Chromaticity Coordinate: $x=0.4704$ $y=0.4219$ / $u'=0.2642$ $v'=0.5332$ ($duv=3.26e-03$)

CCT: $T_c=2644K$ Prcp WaveL: $\lambda_d=583.5nm$ Purity=67.9%

Peak WaveL: $\lambda_p=610nm$ Half Width: $\Delta\lambda_p=126.0nm$ Ratio: R=25.2% G=72.7% B=2.2%

Average Wave: 601nm

Rendering Index: $R_a=81.6$ $R_a'=76.0$

R1 =79 R2 =91 R3 =97 R4 =77 R5 =79 R6 =88 R7 =83 R8 =59

R9 =10 R10=78 R11=74 R12=69 R13=82 R14=99 R15=72

Photo Parameters: (Standard lamp: A2856K)

Flux: $\Phi=479.63(lm)$ Luminous Efficacy: 122.31(lm/W) Luminous Power: $P=1.527(W)$

Electrical Parameters:

U=229.9V I=0.03684A P=3.921W PF=0.463



raw ^{led}

Packaging details

Outer carton size: 37x37x30cm
50 pieces per carton

Gross Weight: 4kg per carton